

JAX BDF CLING-LUBE

NSF H1 Aerosol for Overhead Food Grade Applications


FOOD GRADE

PRODUCT DESCRIPTION

JAX BDF Cling-Lube is a food grade H1 lubricant that clings to overhead chains, conveyors, trolleys and way guides. It was tested on overhead applications in beef processing plants requiring food grade lubricants that cling and will not drip on the product.

PRODUCT BENEFITS

- **Foaming Formula with Extreme "Cling" Characteristics**
- **Extreme Pressure and Antiwear Additives**
- **Corrosion Protection**
- **Great for Hard-to-Reach Areas**
- **Micronox Technology®** — A groundbreaking advance in food grade technology developed with exceptional performance in preserving and protecting food grade lubricants from microbial contamination.
- **NSF H1 Registered**
- **JAX BDF Cling-Lube is available in Aerosol Spray**

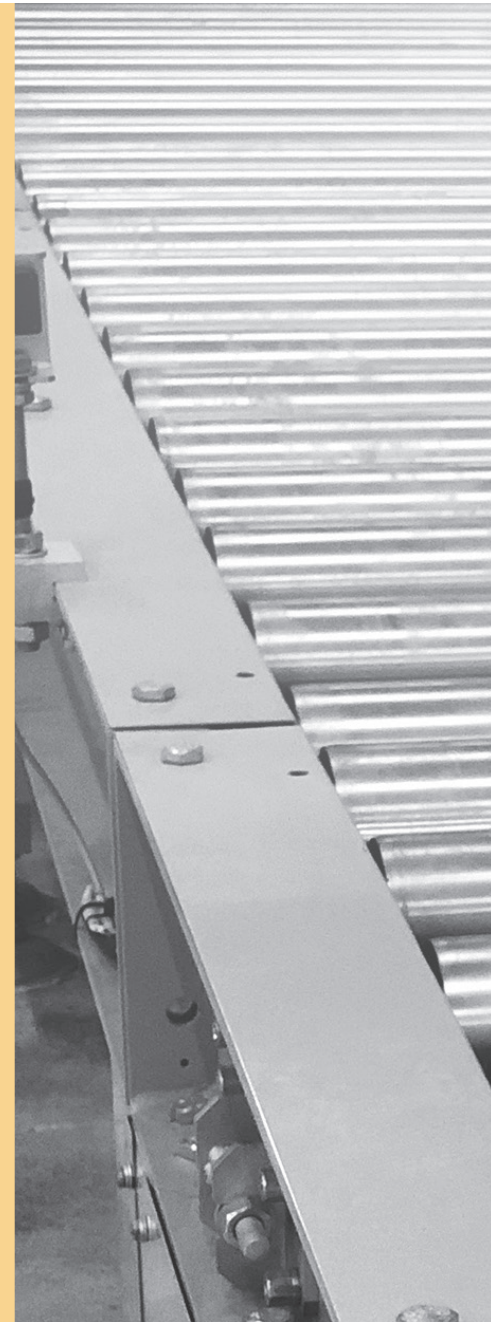

APPLICATIONS

- Lift Overhead chains and conveyors
- Overhead trolleys and way guides
- Conveyors leading into or out of high moisture or steam areas
- Locations that are hard to reach or where frequent lubricating is difficult or inconvenient.



JAX.com



TYPICAL PROPERTIES	BDF CLING-LUBE	METHOD
Propellant	Propane and Butane	
Flash Point	352°F (178°C) concentrate, typical -94°F (-70°C) propellant, typical	ASTM D 92
Spray Pattern	Foam	
Texture	Thick Clingy Film	
Appearance	Light Straw	
Consistency	Heavy	

JAX products undergo continual improvement in formulation and manufacture. The values indicated in this PDS are typical production values at the time of this writing. JAX reserves the right to alter and update product data and typical values at any time without notice. It is the responsibility of the installer and/or purchaser to determine if these specifications are adequate and proper for the intended application. MSDS information may be found at JAX.com or by contacting JAX INC.

PACKAGING

CONTAINER SIZE	BDF CLING LUBE
Aerosol (12/cs)	JAX214