



- the original since 1922 -

TS436LX Pneumatic Caulking Gun

Features:

AntiDrip

Well Balanced Handle

One Hand Pressure Adjustment

Integrated Ratio Shift

Quick reloading




Original Design & Manufacturing



Use:

Cartridge: Dual (2-Component)
Volume: 200ml/1:1 + 2:1
Viscosity: High (Epoxy)

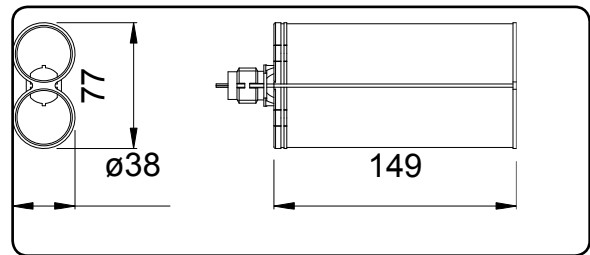

Web - Links: Technical Drawing
(PDF) Maintenance

Description:

Professional
Reinforced Nylon Cartridge Holder
Integrated Rocker Arms (ratio shift)
1/4" RG Air Supply Fitting (EU)
1/4" NPT Air Supply Fitting (US)

Technical Data:

Weight: 1.43 kg
Length: 44.3 cm
Force: 2.7 kN ~270 kg
Air supply: 8 bar (110 PSI)

Variations:

Standard colour: Black/Grey
Adaptation for 4:1 + 10:1
available upon request

Packaging:

Packed individually

For customized versions please contact us

Krøger A/S - Geminivej 4-6 - DK-2670 Greve - Denmark - Phone: +45 43600111 - Fax: +45 43690137
www.mk-guns.dk - mail@mk-guns.dk